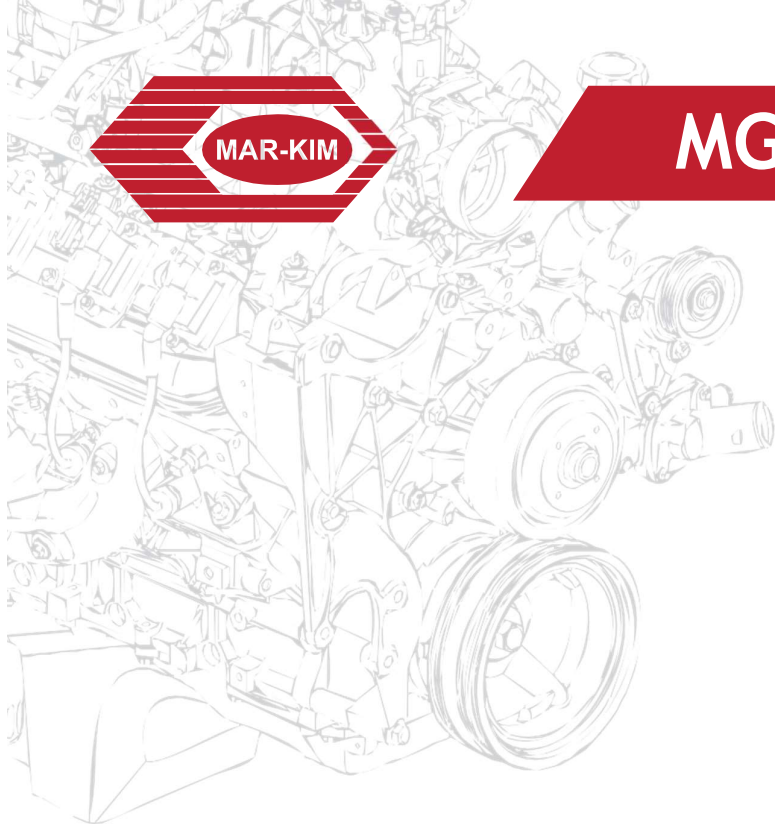


**MAR-KIM****MGG3600-3****3 KVA**

GENERATING SETS

 **THREE PHASE**  **50 HZ**  **GASOLINE**

Service		Standby	Prime
Power	KVA	3	2.7
Standard Voltage	V	230/400	
Rated At Power Factor	Cos Phi	0.8	
Speed	Rpm	3000	

SPECIFICATIONS

Engine	Specifications
Rated Output	2800 W
Manufacturer	MARKIM
Model	MGG3600 3
Max. Altitude	1000 m
Displacement	212 CC
Startup	CORD
Fuel Tank Capacity	12 L
Measurements (LxWxH)	675 x 475 x 500 mm

OTHER SPECIFICATIONS

OVERLOADING PROTECTION
LOW OIL LEVEL PROTECTION
DIGITAL DISPLAY

MAR-KIM CHEMICALS CO. LTD.

KINONDONI TUNISIA ROAD. PLOT NO:137 DAR ES SALAM-TANZANIA

TEL : +255 677 062 017 | +255 677 062 018 | +255 0677 062 022

akifkara46@gmail.com | www.markimgroup.co.tz | instagram: @markimperkinsgenerators